

# Industrial Air Hoists TAH

Tiger industrial air hoists are designed for, and proven in, many industries including mining, shipyards, offshore construction and power stations. They are also used for industrial and general engineering applications such as automotive plants, foundries, and heat treatment plants. The hoists operate at air pressures of between 4 and 6 bar. They comply with the requirements of ASME B30.16 and EN11L1192-2. Our manufacturing facility is 1S09001, 5014001 & OHSAS18001 certified.

- Range - 0.25t to 20t
- Reliable, fast, efficient, quiet and lightweight
- Greater than 5:1 factor of safety
- Suitable for Fleeting/Oblique pulling
- Certified for ATEX Category 3 — normal safety



## More features of Tiger Air Chain Hoists

### Load Limiter

Integral differential pressure load limiting valve automatically prevents the operator lifting a load of more than 125% of the working load limit. Load limiter is 100% repeatable at all working pressures and does not wear or generate damaging heat.

### Emergency Stop

Pendant control hoists are supplied with a main emergency stop valve. This shuts off the main air supply to the hoist when activated.

### Pendant Control Options

Our air hoists are supplied with either aluminum hard anodised controls which offer excellent corrosion protection or our Nickel plated SG iron option (for higher impact resistance combined with greater tensile strength and superior corrosion protection). Twist grip pendants are available as an option. **Our new dual control pendant will operate two hoists with one pendant control. We also have a new remote control option available.**



Aluminum Hard Anodised Pendant



Nickel Plated SG Iron Pendant



Optional Twist Grip Pendant



NEW Dual Hoist Pendant



NEW Remote Control

## More features of Tiger Air Chain Hoists

### Fleeting, Cross Hauling or Oblique Pulling

This type of application is when the load deviates from the vertical position with a force acting directly between load hook and suspension point. Our air hoists can be used for fleeting and oblique pulling operations with no de-ration of the hoist. Cross hauling can be done with a single hoist, two hoists operated independently or with two hoists operated off one dual hoist pendant control.

### Temperature Range

Ambient temperature range -4°F to +158°F (for temperatures outside of this range please contact us for details).

### Precise Control

Accurate and precise positioning of loads is standard for both toggle and pendant control models.

### Fail Safe Disc Brake

Non-asbestos self-adjusting disc brake is applied automatically when the air supply to the hoist is shut off. The brake is self-adjusting for the life of the brake and can hold more than 125% of the working load limit.

### Integral Silencer

The exhaust air silencer is built into the hoist gearbox housing and limits the noise level to below 85dB(A).

### Load Chain

Grade 80 load chain ensures stringent high-speed duty cycles can be met. The load chain is in accordance with the requirements of EN818-7 Appendix B.

### Vane Motor

Assisted vane lifting ensures maximum starting torque when starting under load.

### Sealed Gearbox

The sealed planetary gearbox ensures that the most stringent duty cycles can be met. The gears are heat treated and mounted on high strength, low friction bearings.

### Ease of Maintenance

The modular design of the hoist allows easy access to internal components such as the motor, gearbox, brake and load limiter. Common parts are used throughout the range.

### Optional Chain Carrier

Designed to carry and hold the length of load chain required for the operation, our stainless steel chain bucket is available in different size options. These chain carriers prevent loose chain from getting snagged during lifting or lowering operations and protect any loose chain during transit to and from the operational site.

### ATEX

Manufactured in accordance with ATEX Directive 2014/34/EU and Machinery Directive 2006/42/EC and suitable for ATEX Category 3 – normal safety. Our products are assigned as follows: ATEX marking: : Ex II 3 GD c IIB T4 IIIB T135°C. Suitable for gas and dust hazardous areas: Zone 2 (gas) and Zone 22 (dust).



### Ex II 3 GD c IIB T4 IIIB T135°C

<b>II</b>	<b>3</b>	<b>GD</b>	<b>c</b>	<b>IIB</b>	<b>T4</b>	<b>IIIB</b>	<b>T135°C</b>	
								<b>T135°C</b> Dust Temperature Class: Maximum external surface temperature 135°C
								<b>IIIB</b> Groups of Dust: Protected for group IIIC which includes groups IIIA
								<b>T4</b> Gas Temperature Class: Maximum external surface temperature 135°C
								<b>IIB</b> Gas Explosion Group: Protected for group IIB whicj includes group IIA
								<b>c</b> Protection type: Design safety
								<b>GD</b> Ex Atmosphere: Gas and Dust
								<b>3</b> Category: Normal Safety
								<b>II</b> Equipment Group: surface industries


Also available for ATEX Category 2 – high safety – please contact us for more information.



# Industrial Air Hoists TAHS




TAHS-002

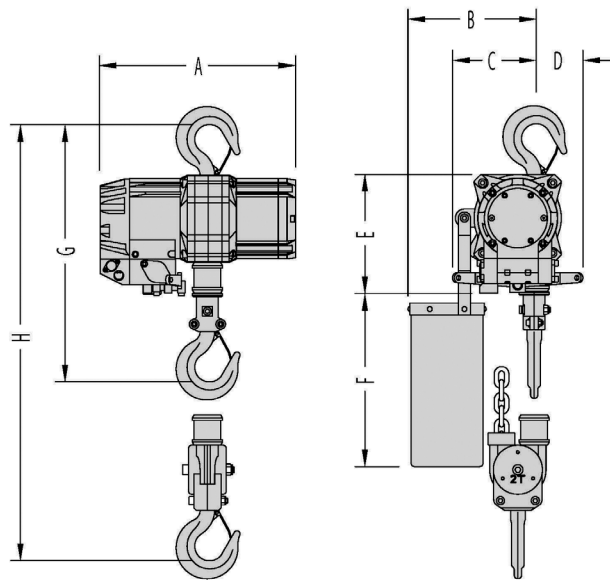

Product Code	Capacity (tons, T)	Falls of Chain	Chain Size (mm, in)	Total Weight (kg*, lbs)	Full Load Lifting Speed (m/min, ft/min)	No Load Lifting Speed (m/min, ft/min)	Full Load Lowering Speed (m/min, ft/min)	No Load Lowering Speed (m/min, ft/min)	Air Consumption (m³/min, cfm)	Air Connection	Supply Hose (Inside Ø) (mm, in)	Sound Level (dB(A))	Dimensions (mm, in)							
													A	B	C	D	E	Min F	Min G	Min H
TAHS-002	0.25, 0.27	1	7.1x21.2, 0.28x0.83	25.0, 55	22.5, 73	32.0, 105	31.0, 101.5	25.0, 82	2.1, 74	NPT½	16, ¾	76	312, 12.3	216, 8.5	135, 53.1	85, 3.3	196, 7.7	370, 14.5	420, 16.5	-
TAHS-005	0.5, 0.55	1	7.1x21.2, 0.28x0.83	25.0, 55	15.0, 49	29.5, 97	36.0, 118	23.0, 75	2.1, 74	NPT½	16, ¾	76	312, 12.3	216, 8.5	135, 53.1	85, 3.3	196, 7.7	370, 14.5	420, 16.5	-
TAHS-010	1.0, 1.1	1	7.1x21.2, 0.28x0.83	25.0, 55	7.5, 25	16.0, 52.5	20.4, 67	13.0, 42	2.1, 74	NPT½	16, ¾	76	312, 12.3	216, 8.5	135, 53.1	85, 3.3	196, 7.7	370, 14.5	420, 16.5	-
TAHS-020	2.0, 2.2	2	7.1x21.2, 0.28x0.83	32.8, 72	3.8, 12.5	8.0, 26	10.2, 33	6.5, 21	2.1, 74	NPT½	16, ¾	76	312, 12.3	216, 8.5	135, 53.1	85, 3.3	196, 7.7	370, 14.5	-	495, 19.5

\*Weight of TAHS model includes 3m/10' lift, 2m/6.5' toggle control. For longer lifts add 1.1kg/.75lbs for TAHS-002, TAHS-005, and TAHS-010 models and 2.2kg/1.5 lbs for TAHS-020 per meter/foot of lift. For pendant control add 0.8kg/0.5 lbs. per meter/foot.

# Industrial Air Hoists TAH21

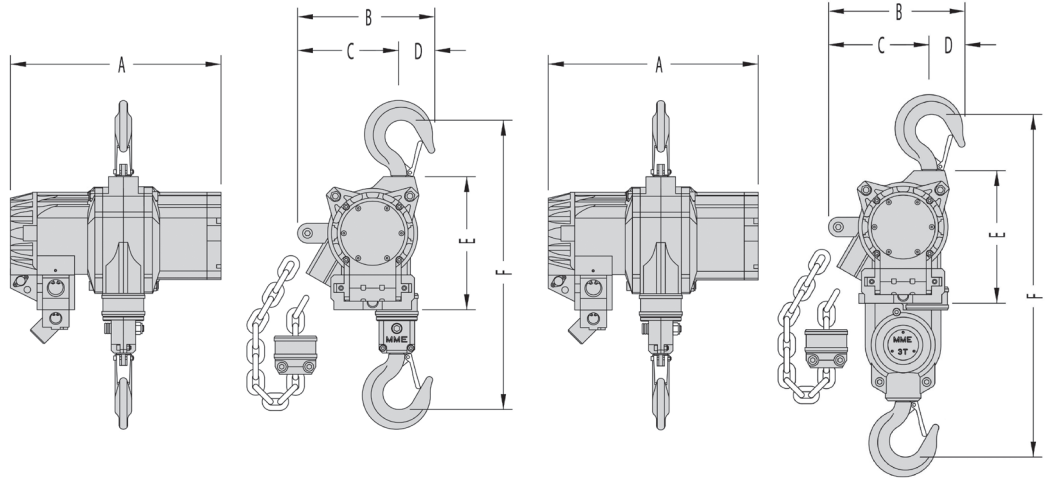

1.5 and 2.0t

3.0t

Product Code	Capacity (tons, T)	Falls of Chain	Chain Size (mm, in)	Total Weight (kg*, lbs)	Full Load Lifting Speed (m/min, ft/min) @ 6 bar	Full Load Lowering Speed (m/min, ft/min) @ 4 bar	No Load Lifting Speed (m/min, ft/min) @ 6 bar	Full Load Lowering Speed (m/min, ft/min) @ 6 bar	No Load Lowering Speed (m/min, ft/min) @ 6 bar	Air Consumption (m³/min, cfm) @ 6 bar	Air Consumption (m³/min, cfm) @ 4 bar	Air Connection	Supply Hose (Inside Ø) (mm, in)	Sound Level (dB(A))		Dimensions (mm, in)					
														Full Load Lifting @ 6bar	Full Load Lowering @ 6bar	A	B	C	D	E	Min F
TAH21-015	1.5, 1.65	1	10x28, 0.39x1.10	55, 121	6.2, 20	4.2, 14	8.7, 28.5	8.6, 28	7.5, 25	92, 2.6	1.7, 60	NPT <sup>3</sup> / <sub>4</sub>	19, <sup>3</sup> / <sub>4</sub>	81	83	382, 15	250, 9.8	184, 7.25	66, 2.6	213, 8.4	515, 20.2
TAH21-021	2.0, 2.2	1	10x28, 0.39x1.10	55, 121	5.3, 17	3.0, 9.8	8.7, 28.5	9.0, 29.5	7.5, 25	92, 2.6	1.7, 60	NPT <sup>3</sup> / <sub>4</sub>	19, <sup>3</sup> / <sub>4</sub>	81	83	382, 15	250, 9.8	184, 7.25	66, 2.6	213, 8.4	515, 20.2
TAH21-032	3.0, 3.3	2	10x28, 0.39x1.10	67, 148	3.1, 10	2.1, 7	4.3, 14	4.3, 14	3.7, 12	92, 2.6	1.7, 60	NPT <sup>3</sup> / <sub>4</sub>	19, <sup>3</sup> / <sub>4</sub>	81	83	382, 15	250, 9.8	184, 7.25	66, 2.6	213, 8.4	610, 24


\*Weight of TAH21 model includes 3m/10' lift, 2m/6.5' toggle. For longer lifts add 2.2kg/1.5lbs per meter/foot of lift for TAH21-015, TAH21-021 and 4.4kg/3lbs for the TAH21-032 per meter/foot of lift. For pendant control add 0.4kg/0.9 lbs. for E/Stop pendant add 2.1kg/1.4lbs per meter/foot



# Industrial Air Hoists TAH33



TAH33-060

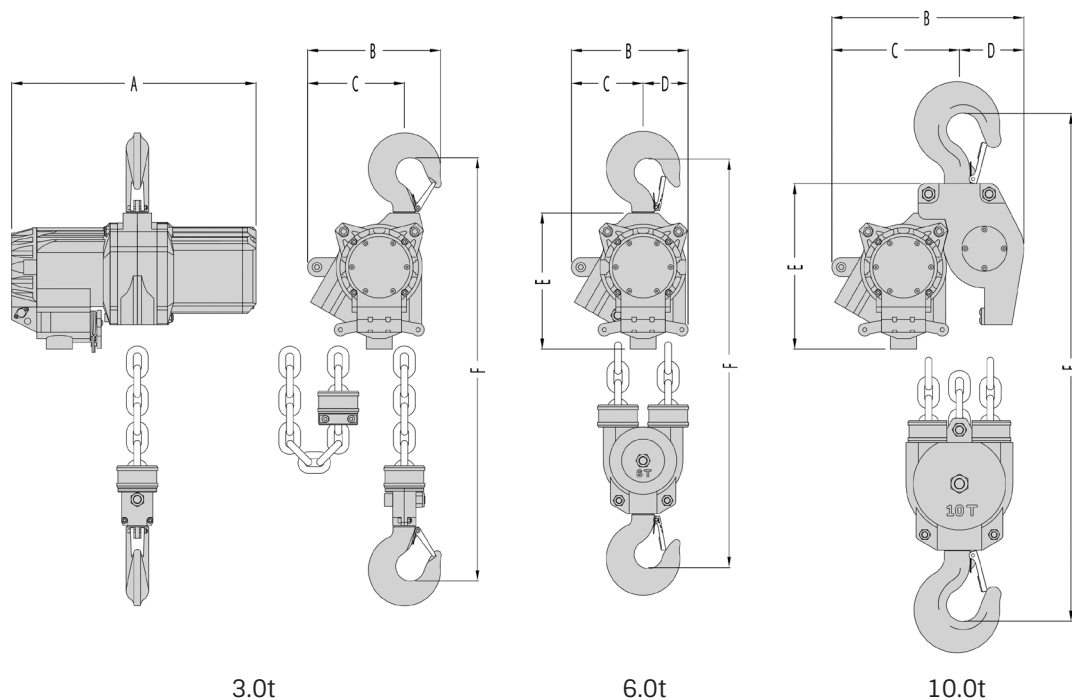

3.0t

6.0t

10.0t


Product Code	Capacity (tons, T)	Falls of Chain	Chain Size (mm, in)	Total Weight (kg*, lbs)	Full Load Lifting Speed (m/min, ft/min) @ 6 bar	Full Load Lifting Speed (m/min, ft/min) @ 4 bar	No Load Lifting Speed (m/min, ft/min) @ 6 bar	Full Load Lowering Speed (m/min, ft/min) @ 6 bar	No Load Lowering Speed (m/min, ft/min) @ 6 bar	Air Consumption (m³/min, cfm) @ 6 bar	Air Consumption (m³/min, cfm) @ 4 bar	Air Connection		Supply Hose (inside Ø) (mm, in)	Sound Level (dB(A))		Dimensions (mm, in)					
												Toggle & Pilot Pendant Control	E/Stop Pilot Pendant Control		Full Load Lifting @ 6bar	Full Load Lowering @ 6bar	A	B	C	D	E	Min F
TAH33-030	3.0, 3.3	1	13x36, 0.5x1.4	76.5, 169	5.3, 17	3.8, 12	7.5, 25	8.3, 27	6.8, 22	4.0, 142	2.6, 92	NPT1	NPT¾	25, 1	81	83	466, 18.3	254, 10	185, 7.3	-	-	538, 21.1
TAH33-060	6.0, 6.6	2	13x36, 0.5x1.4	99.5, 219	2.6, 8.5	1.9, 6.25	3.7, 12	4.1, 13.5	3.4, 11	4.0, 142	2.6, 92	NPT1	NPT¾	25, 1	81	83	466, 18.3	223, 8.8	137, 5.4	86, 3.4	259, 10.2	630, 24.8
TAH33-103	10.0, 11.0	3	13x36, 0.5x1.4	139.5, 308	1.6, 5.25	1.1, 3.5	2.4, 7.8	2.6, 8.5	2.2, 7	4.0, 142	2.6, 92	NPT1	NPT¾	25, 1	81	83	466, 18.3	366, 4.4	243, 9.6	123, 4.9	315, 12.4	786, 31

\*Weight of TAH33 model includes 3m/10' lift, 2m/6.5' toggle control. For longer lifts add 3.8kg/2.5lbs per meter/foot of lift for TAH33-030, 7.6kg/5.1lbs for the TAH33-60 and 11.4kg/7.7lbs for the AH-103 per meter/foot of lift. For pendant control add 0.8kg/0.5lbs.


# Industrial Air Hoists TAH52




TAH52-160

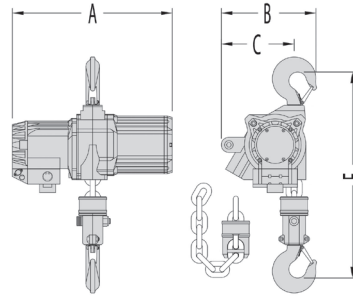


5.0t

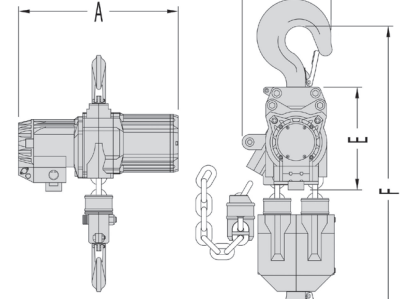

10.0t

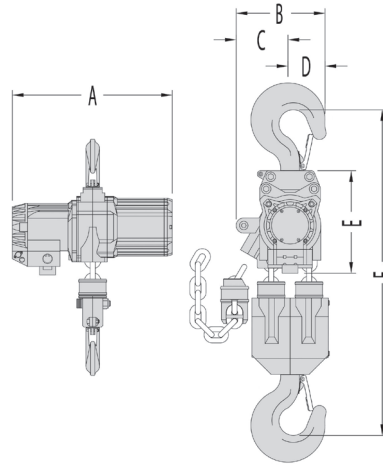

16.0 and 20.0t

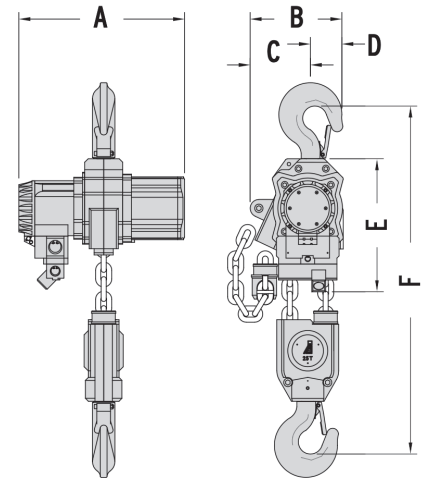

25.0 & 30.0t

Product Code	Capacity (tons, T)	Falls of Chain	Chain Size (mm, in)	Total Weight (kg*, lbs)	Full Load Lifting Speed (m/min, ft/min) @ 6 bar †	Full Load Lowering Speed (m/min, ft/min) @ 4 bar †	No Load Lifting Speed (m/min, ft/min) @ 6 bar †	Full Load Lowering Speed (m/min, ft/min) @ 6 bar †	No Load Lowering Speed (m/min, ft/min) @ 6 bar †	Air Consumption (m³/min, cfm) @ 6 bar	Air Consumption (m³/min, cfm) @ 4 bar	Air Connection		Supply Hose (Inside Ø) (mm, in)	Sound Level (dB(A))		Dimensions (mm, in)					
												Toggle & Pilot Pendant Control	E/Stop Pilot Pendant Control		Full Load Lifting @ 6bar	Full Load Lowering @ 6bar	A	B	C	D	E	Min F
TAH52-050	5.0, 5.5	1	16x45, 0.6x1.8	106, 234	3.0, 9.8	1.9, 6.2	4.0, 13	4.4, 14.4	3.3, 10.8	4.0, 141.3	2.6, 91.8	NPT1	NPT <sup>3</sup> / <sub>4</sub>	25, 1	82	83	503, 19.8	300, 11.8	230, 9.1	-	-	600
TAH52-102	10.0, 11	2	16x45, 0.6x1.8	152, 335	1.5, 4.9	0.9, 3	2.0, 6.5	2.2, 7.2	1.7, 5.6	4.0, 141.3	2.6, 91.8	NPT1	NPT <sup>3</sup> / <sub>4</sub>	25, 1	82	83	503, 19.8	270, 10.6	170, 6.7	100, 3.9	286, 11.3	790, 31.1
TAH52-160	16, 17.6	3	16x45, 0.6x1.8	245, 540	0.9, 3	0.6, 2	1.1, 3.6	1.3, 4.2	1.0, 3.3	4.0, 141.3	2.6, 91.8	NPT1	NPT <sup>3</sup> / <sub>4</sub>	25, 1	82	83	616, 24.3	290, 11.4	180, 7.1	110, 4.3	325, 12.8	905, 35.6
TAH52-200	20, 22	4	16x45, 0.6x1.8	288, 635	0.7, 2.3	0.4, 1.3	0.9, 3	1.0, 3.2	0.8, 2.6	4.0, 141.3	2.6, 91.8	NPT1	NPT <sup>3</sup> / <sub>4</sub>	25, 1	82	83	616, 24.3	280, 11.0	165, 6.5	115, 4.5	325, 12.8	920, 36.2
TAH52-300	30, 33	2	23.5x66, 0.9x2.6	575, 1268	1.1, 3.6	0.8, 2.6	2.5, 8.2	2.8, 9.2	2.0, 6.6	6.5, 229.5	4.4, 155.4	NPT1	NPT <sup>3</sup> / <sub>4</sub>	35, 1-3/8"	82	83	762, 30	422, 16.6	277, 10.9	145, 5.7	605, 23.8	1290, 50.8

\*Weights of TAH52 model includes 3m/10' lift, 2m/6.5' toggle control. For longer lifts, add 5.7kg/12.6lbs per meter/foot of lift for model TAH52-050. Add 11.4kg/25.1lbs per meter/foot of lift for the TAH52-102. Add 17.1kg/37.7lbs per meter/foot of lift for the TAH52-160. Add 22.8kg/50.3lbs per meter/foot of lift for the TAH52-200, and add 24.6kg/54.23lb for the TAH52-300. \*For pendant control add 0.8kg/1.8lbs

