



Universal Beam Clamp BCU

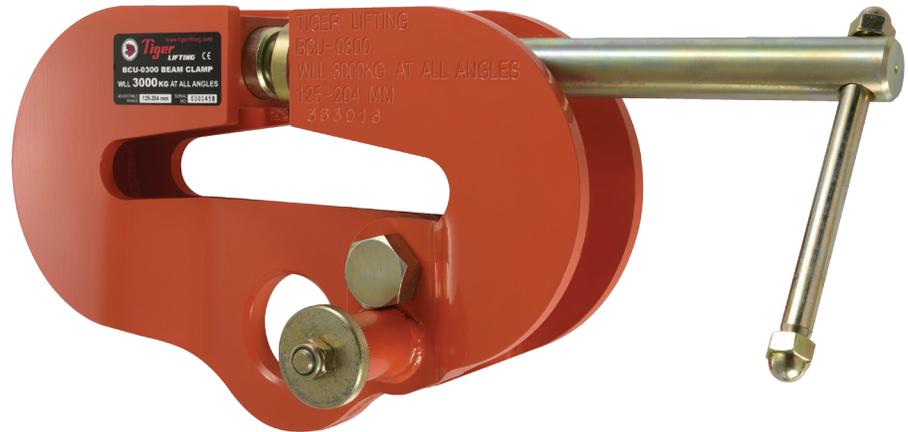

The Tiger Universal Beam Clamp Model BCU has been designed not only for vertical use, but also for side load applications, where conventional clamps are not suitable. This clamp is highly flexible in application and can be used for lifting, pulling or as a semi-permanent anchor point.

It can be loaded at any angle and eliminates the use of spreader beams in various lifting operations.

- Suitable for pulling and lifting at angles across the beam
- Designed for both vertical and side loading applications - can be loaded at any angle
- Full rated capacity at any lifting angle
- Quick and versatile rigging point for hoisting equipment
- Low headroom design
- Highly flexible - for lifting, pulling or as a semi-permanent anchor point
- Designed to accommodate a wide range of beam widths
- Multidirectional adjusting screw spindle ensures a high clamping force to the beam web
- Operating temperature of -50°C to $+50^{\circ}\text{C}$ (-58°F to $+122^{\circ}\text{F}$)
- 4:1 factor of safety
- Complies with ASME B30.20 and EN13155:2003+A2 :2009

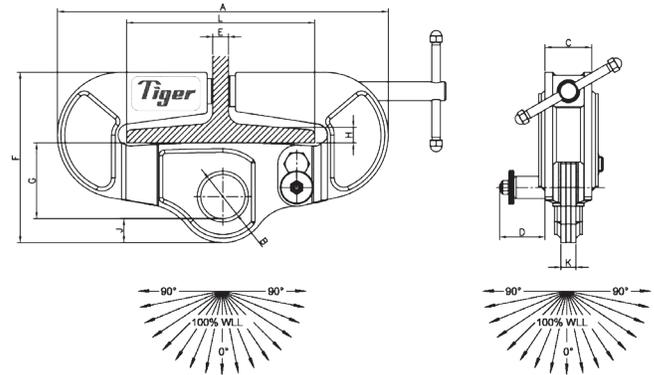

Product Code	Capacity (tons, T)	Dimensions (mm, in)											Net Weight (lb)
		A	B	C	D	E	F	G	H	J	K	L	
BCU-0200	2.0, 2.2	337, 13.27	58, 2.28	60, 2.36	68, 2.68	32, 1.26	203, 7.99	88.5, 3.48	255, 10.0	22.5, 0.89	20, 0.79	76-190, 2.99-7.48	22.05
BCU-0300	3.0, 3.3	387, 15.2	60, 2.4	70, 2.8	63, 2.5	32, 1.3	235, 9.3	100, 3.9	254, 1.0	28, 1.1	20, 0.8	125-204, 4.9-8.0	34.2
BCU-0500	5.0, 5.5	524, 20.6	70, 2.8	74, 2.9	72, 2.8	32, 1.3	270, 10.6	120, 4.7	254, 1.0	38, 1.5	24, 0.9	125-305, 4.9-12.0	59.5
BCU-1000	10.0, 11.0	524, 20.6	70, 2.8	75, 3.0	82, 3.2	32, 1.3	278, 10.9	120, 4.7	254, 1.0	38, 1.5	25, 0.9	125-305, 4.9-12.0	69.0

Warning: Do not exceed working load limits or use this equipment for lifting flat plate sections